

STAR TCP300 / TCP300II / TCP400 Card Printer Driver Installation Guide

Date : 19-Oct-2011


Installation Step:

1. Install Driver CD → 2. Turn On Card Printer & Install USB Vendor Class Driver → 3. Install Printer Driver


- In Step 3 (Install Printer Driver), setup program can only run on Windows XP SP2. If you are using Windows XP SP3 or Windows 7, please install the Printer Driver manually.
- This version of Windows Driver support 32bit Windows operating system only.


Step 1 (Install Dirver CD) :


Insert the STAR TCP Driver CD into your CD-ROM driver. Click on the “autorun.exe” from the root of the CD to run setup. Click “Accept” to accept the software license agreement.

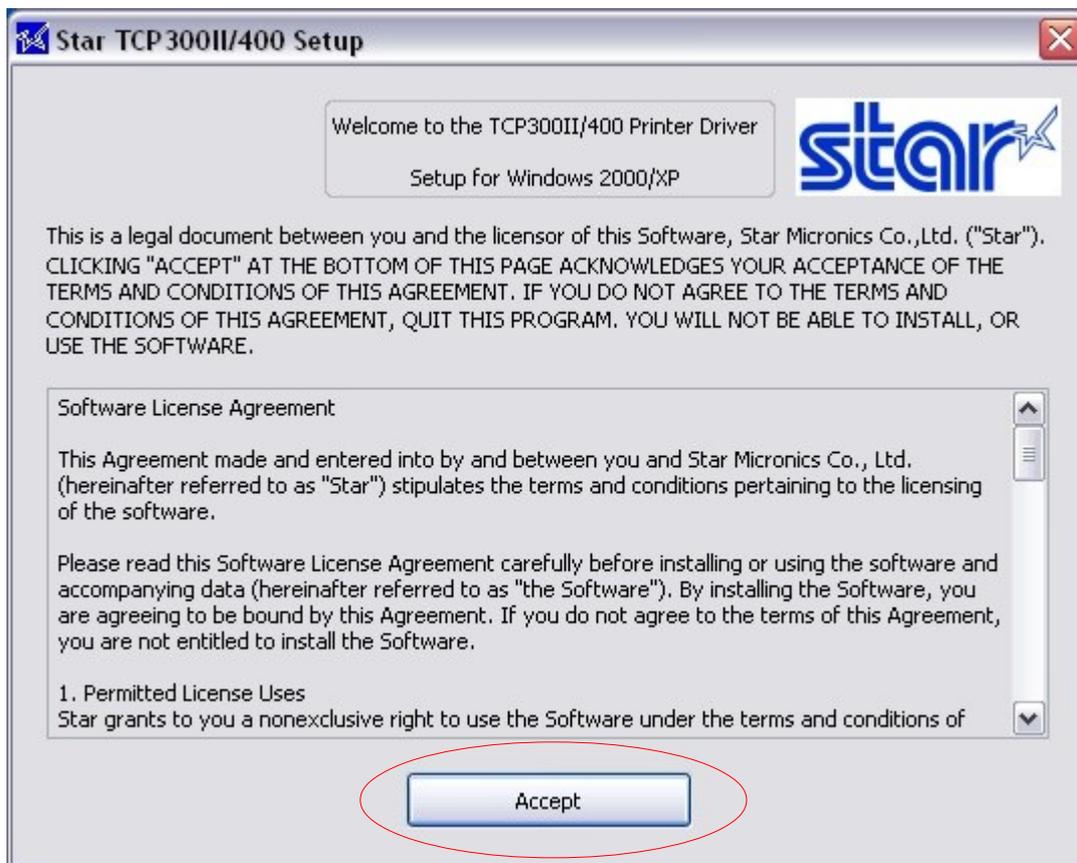

A warning message will appear to remind you not to connect the printer to PC while installing CD. Click “OK” to continue.

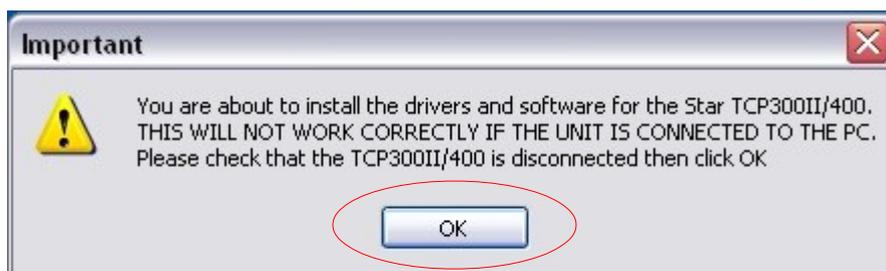


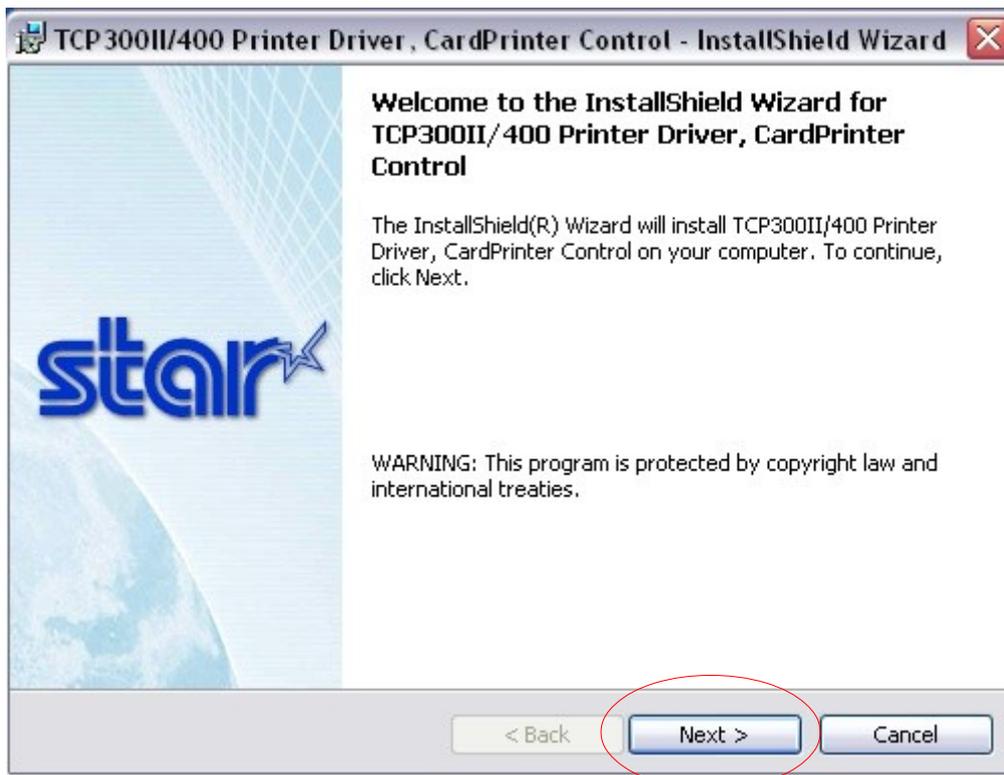

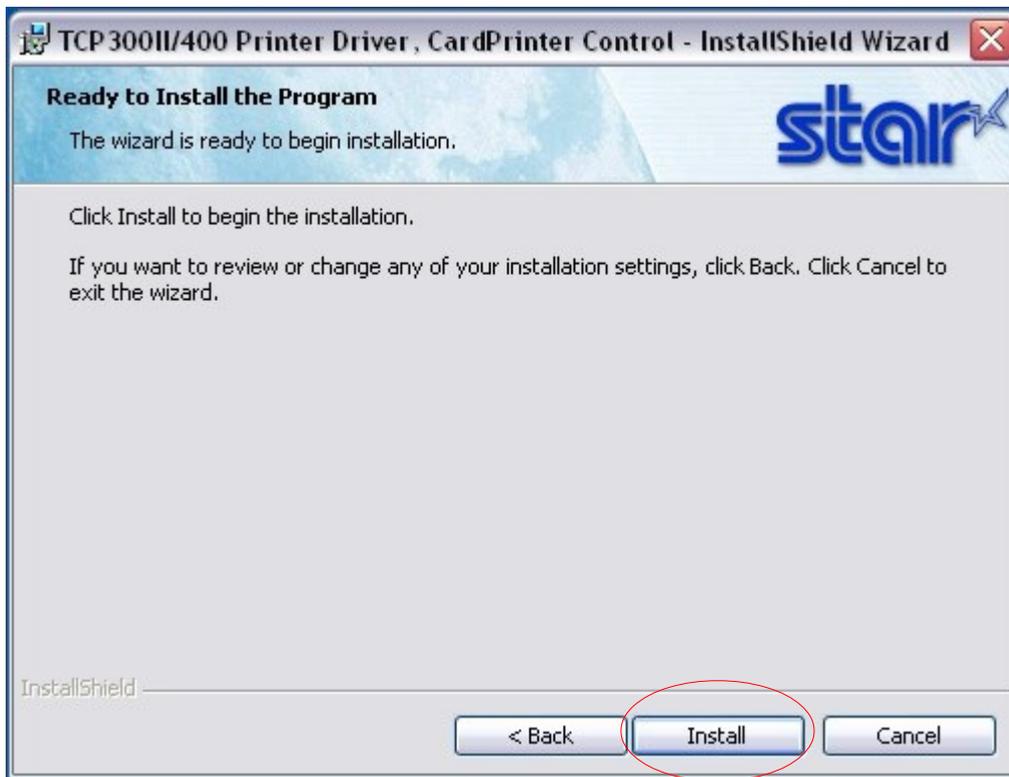


Click "Continue Anyway" to continue setup process.



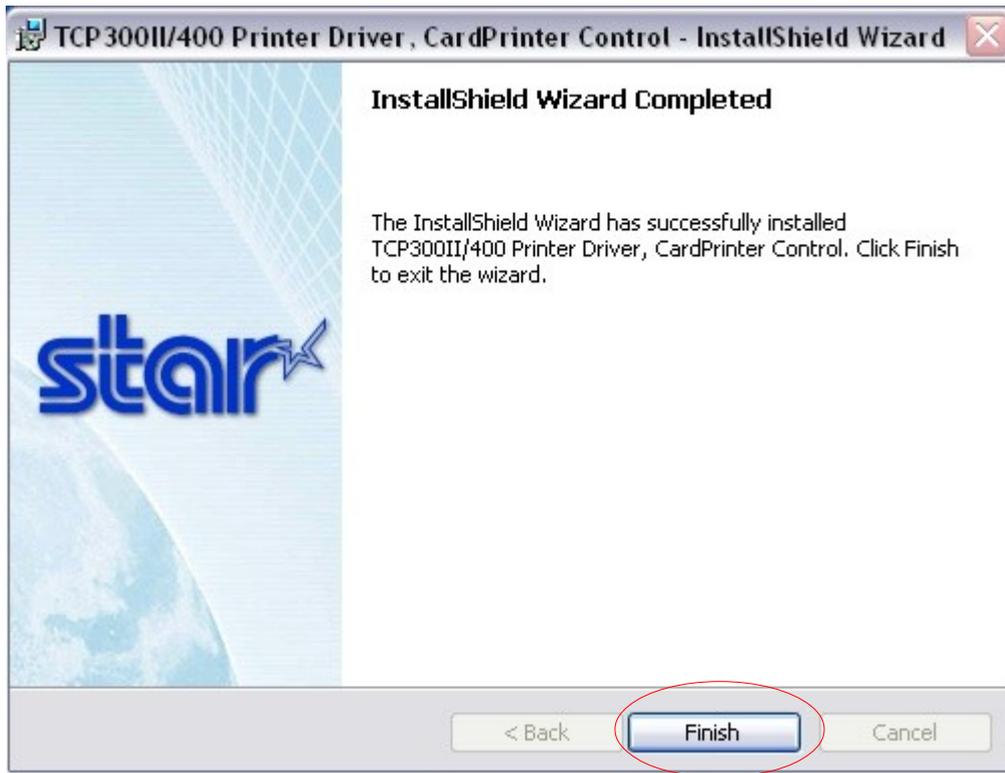


If you are using Windows XP SP2, you can click “Install the printer driver” to continue install the printer driver. If not, you can install it manually.

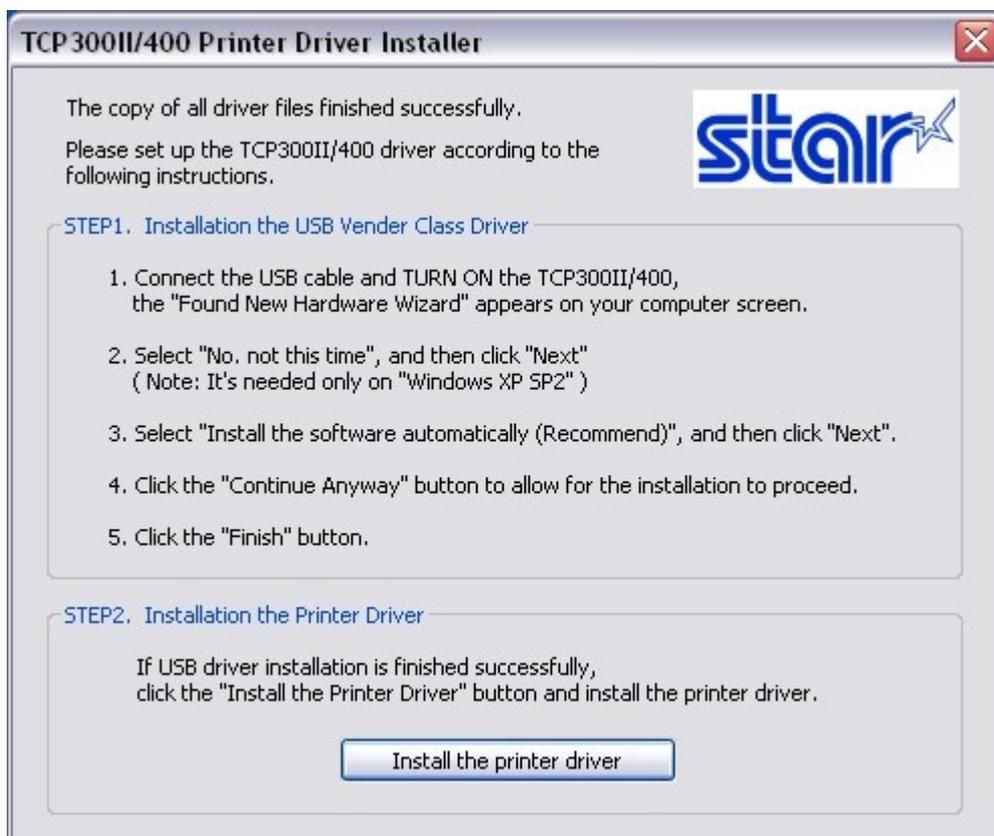

Step 2 (Turn on Card Printer & Install USB Vendor Class Driver):


Your Card Printer will be detected by Windows after power on.

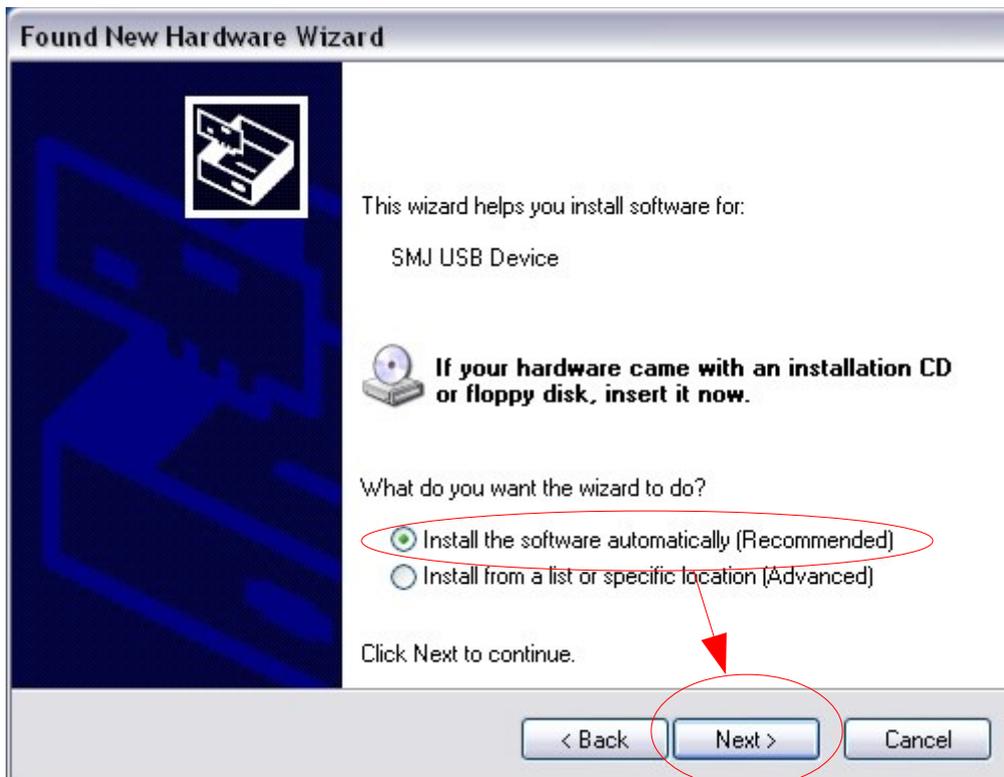

The “SMJ USB Device” driver will be installed automatically. Click “Finish” to continue.




Enter the “Device Manager” → “Ports” to view the COMx number of the SMJ USB Device. My Device is COM3. This value may vary in difference PC.

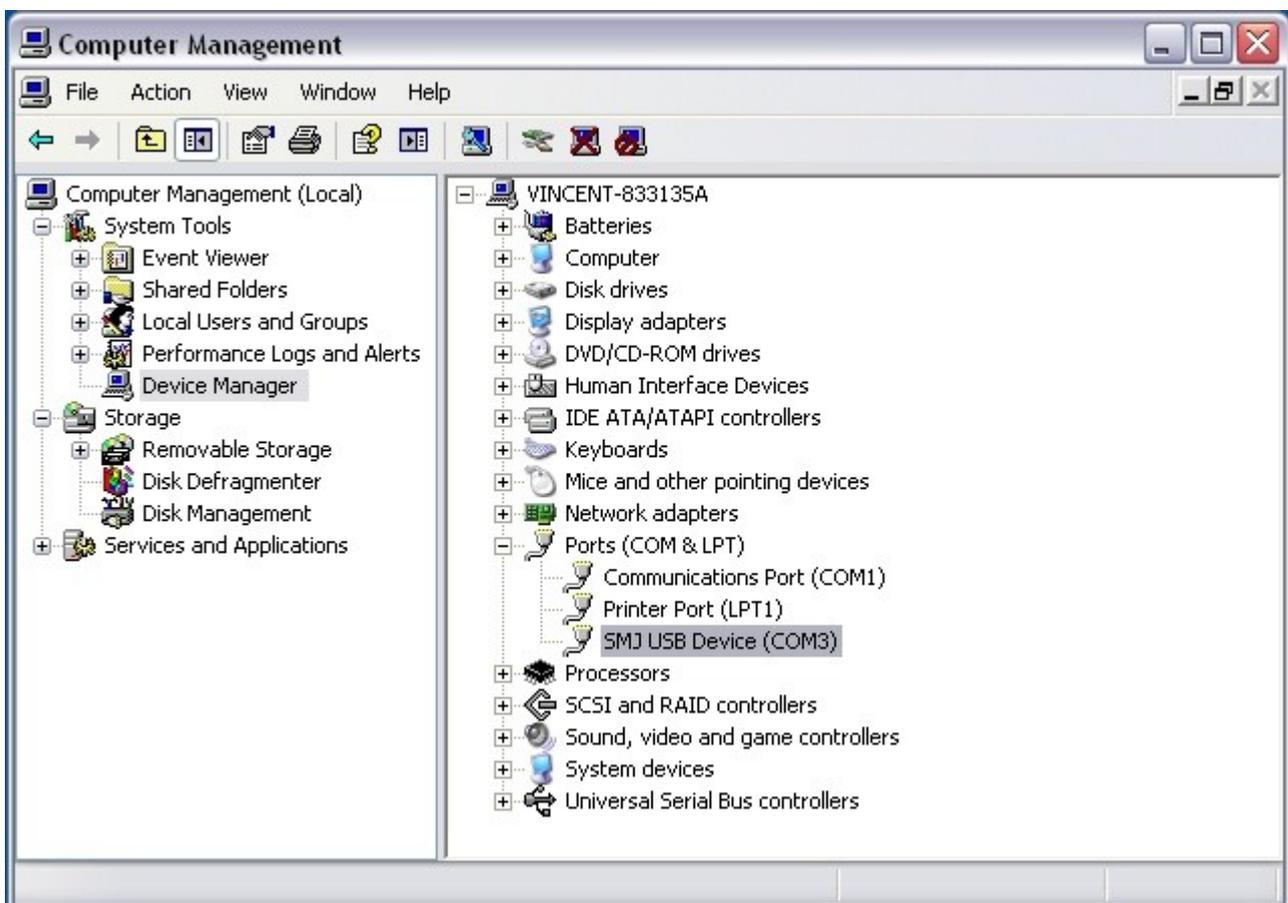


Step 3 (Install Printer Driver Manually):


Extract the driver file from the CD \Driver\TCP300II_400PrinterDriver_2000XP.zip to your Hard Disk first. Enter “Control Panel” → “Printers and Faxes”, Click “Add a printer” → “Next”

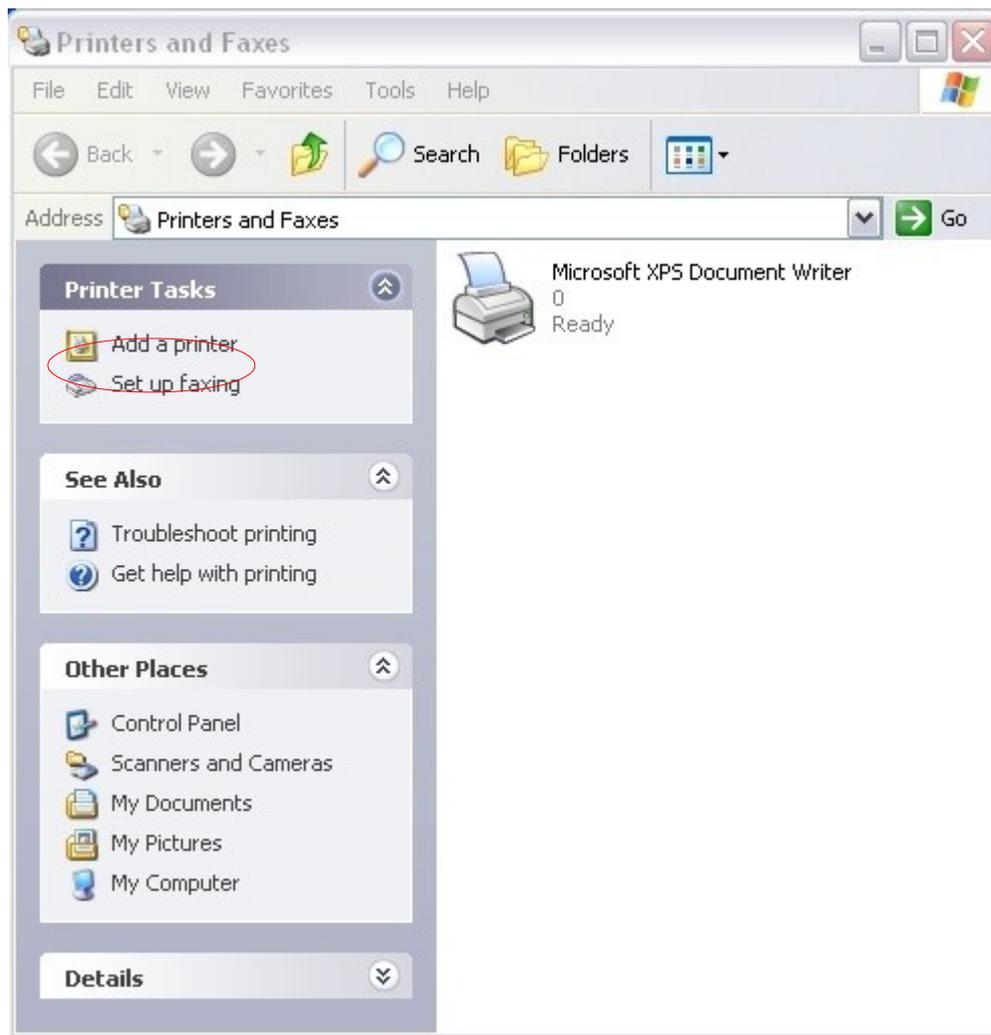


Select "Local Printer" and then Uncheck "Automatically detect and install my Plug and Play printer"
Click "Next" to continue

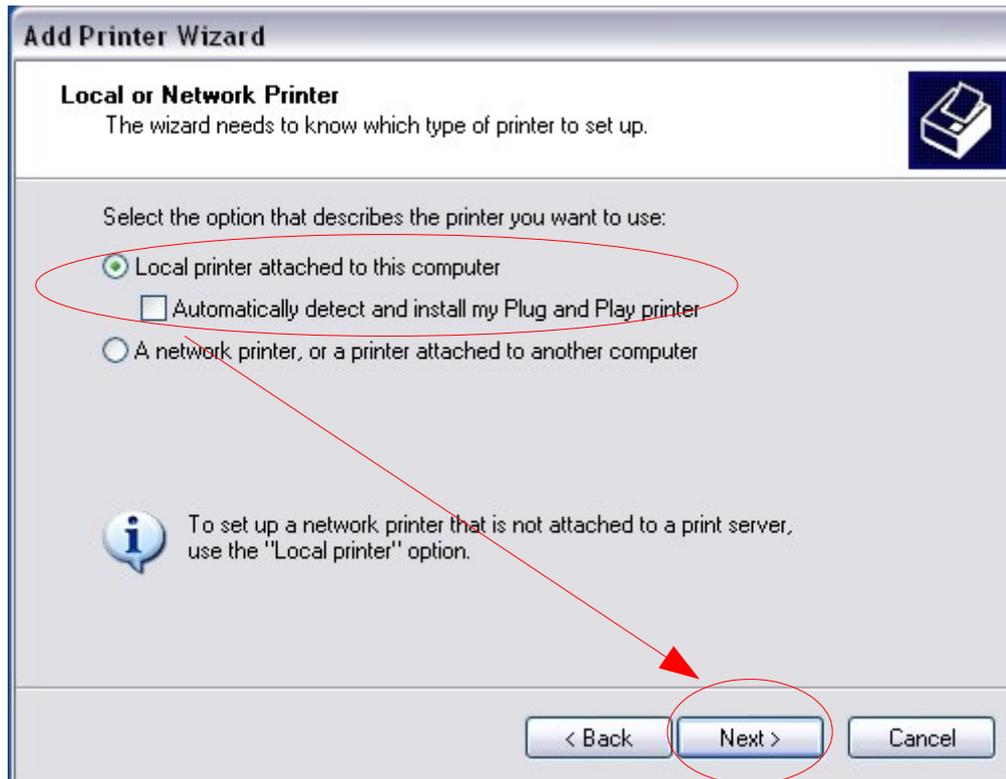


Select the correct COMx port, then click "Next" to continue

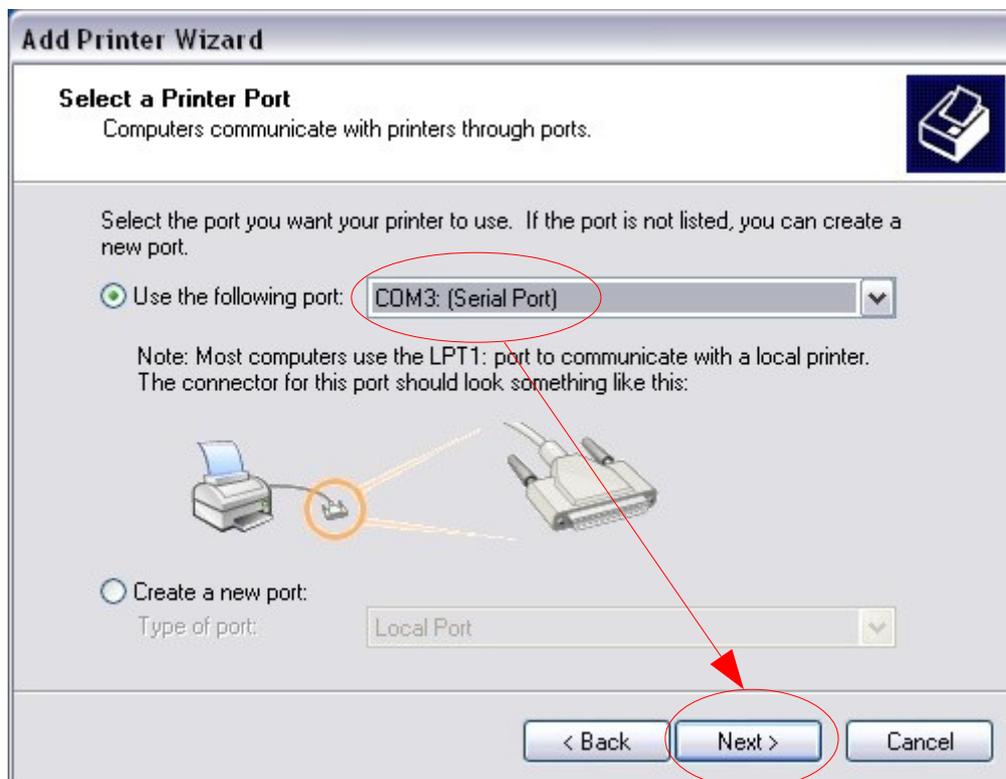


Click “Have Disk...” → “Browse” → Select “SMJTCP.inf” → Click “Open” → “Next”

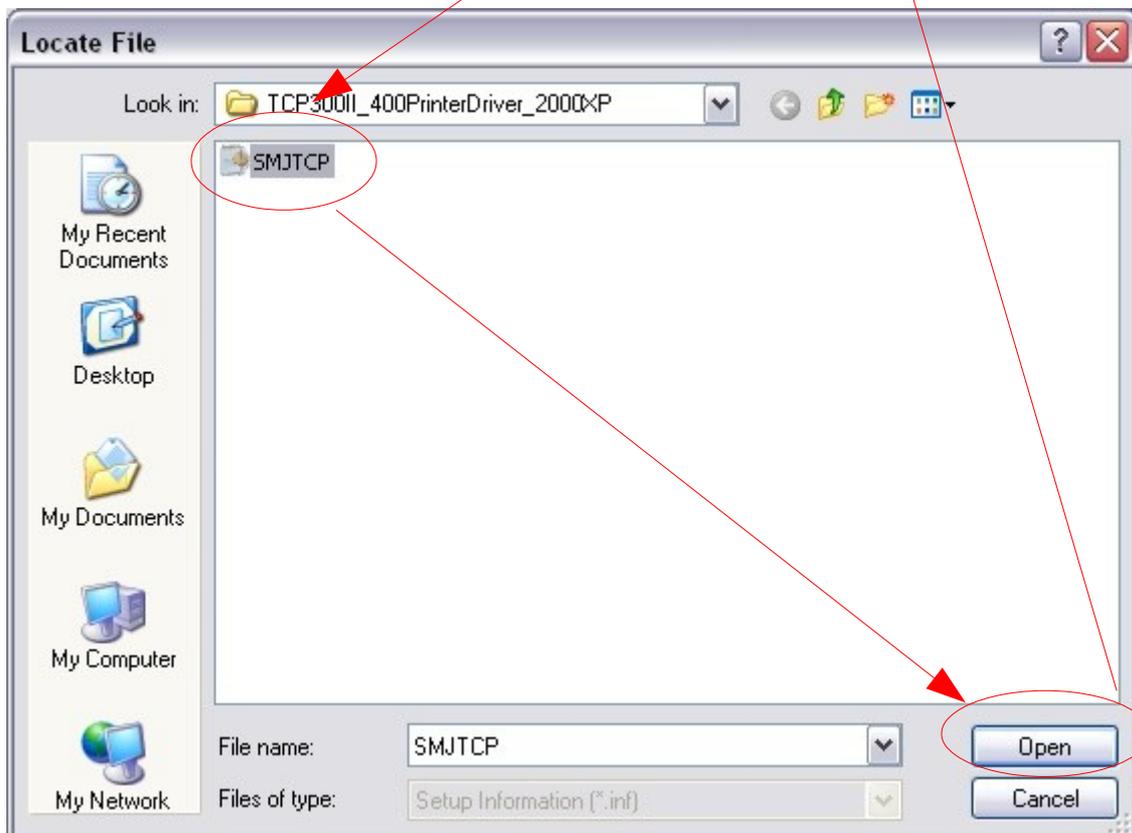


Select the correct card printer model → Click “Next”

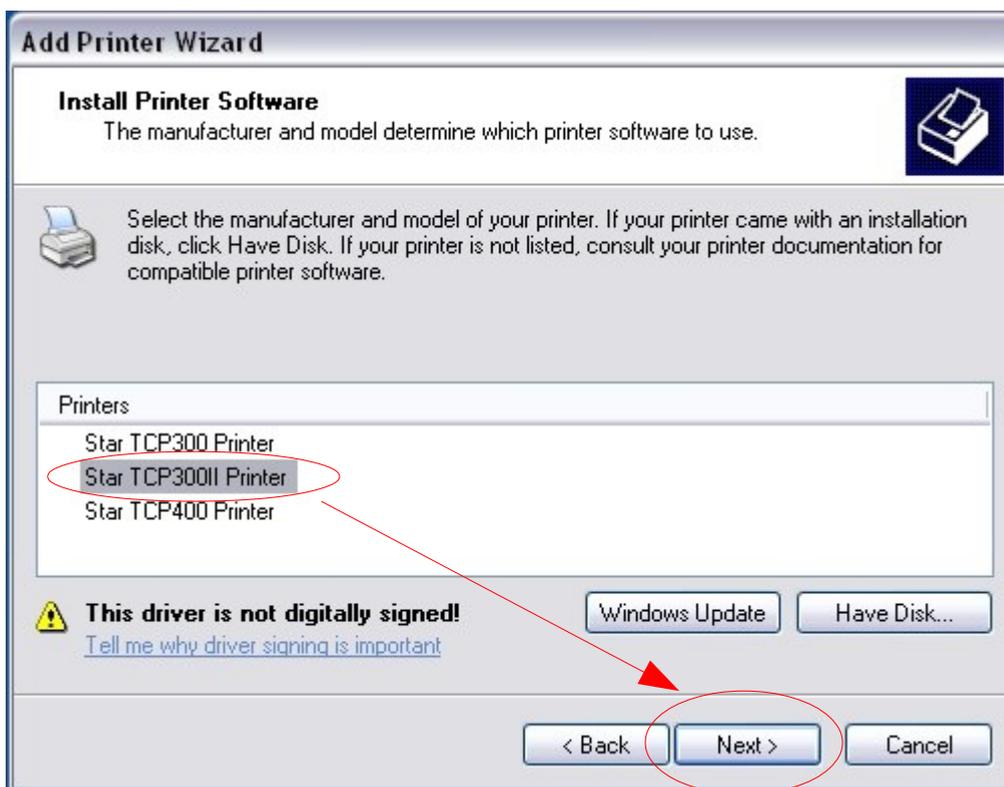

Change the printer name if needed and set the card printer as a default printer → Click “Next”

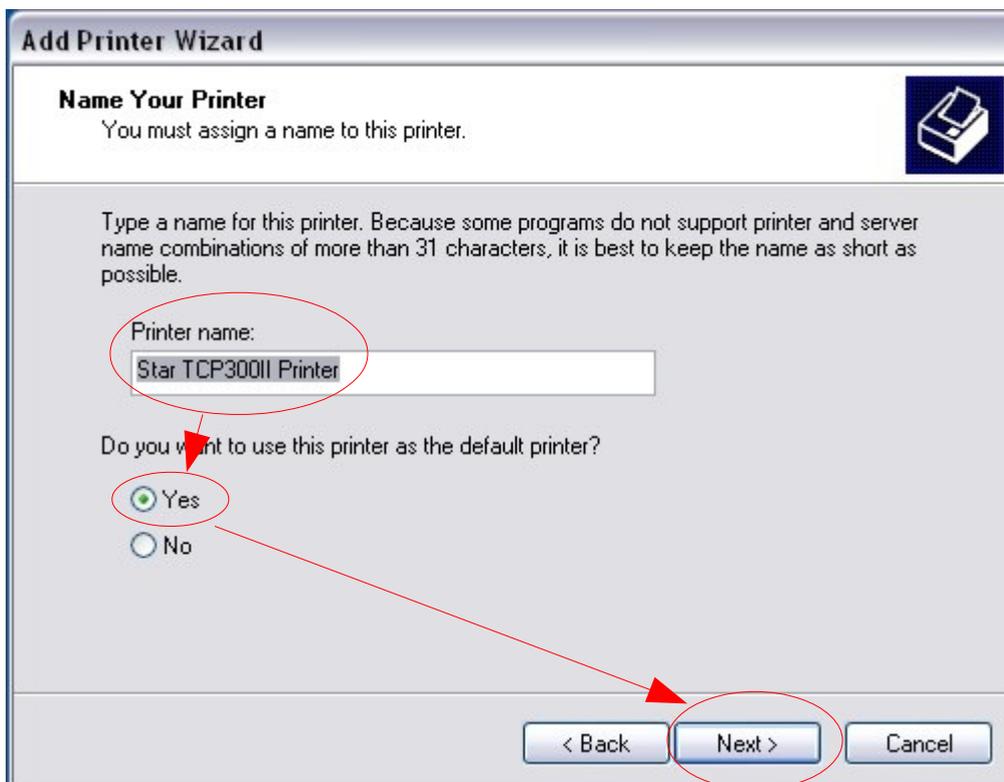

Answer "No" for print a test page → Click "Next"

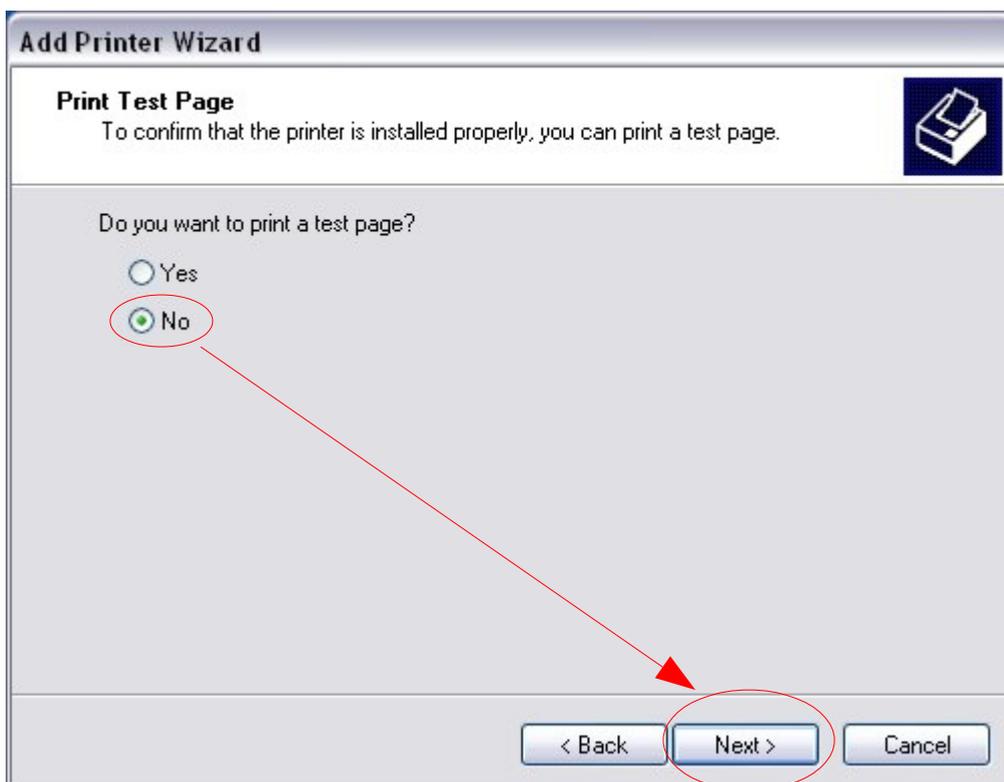

Click "Finish" to continue



Click “Continue Anyway” to continue setup process.



The TCP card printer driver is now installed.

