


80mm Kiosk Printer SK1 Series



31ASF
Mini

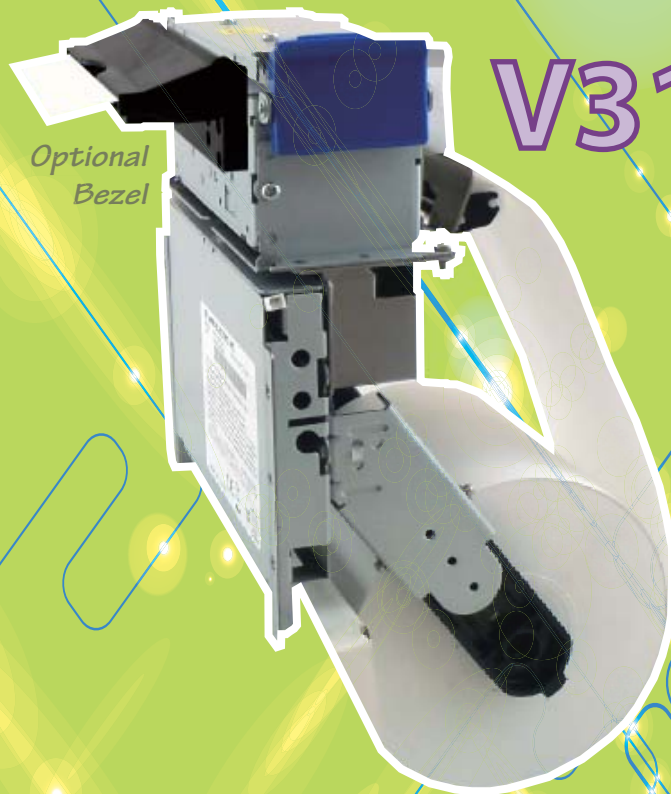

- Fully opening paper cover
- Max 200mm/sec high speed printing
- Support label printing
- Sensor : Paper Empty, Paper Near-End, Black Mark & Label Gap
- Support 58/60/80/83mm paper width
- Paper core diameter 12/25.4mm changable
- Paper thickness from 60 to 150g
- Up to Φ 120mm paper roll diameter
- Dual interface : USB + COM
- Compact and light weight

Optional Accessories

Bezel



LED Bezel



Presenter



Large Paper Holder



SPECIFICATION

| | SK1-31 series | SK1-V31 series |
|------------------------|----------------------------------------------------|----------------|
| Model | | |
| Printing Method | Direct line Thermal | |
| Emulation | ESC/POS™ | |
| Resolution | 8 dots/mm (203dpi) | |
| Number of dots | 432/448/576/640 dots | |
| Printing / paper width | 54/58mm, 56/60mm, 72/80mm, 80/83mm | |
| Paper Thickness | 60 ~ 150µm | |
| Printing Speed | Max 200mm/sec | |
| Interface | USB2.0 + RS232C (max. 115,200 bps) | |
| Font | 8x16, 12x24 dots | |
| Barcode | JAN8/13, Code39/128, ITF, Codabar, UPC-A/E | |
| 2D Barcode | QR, Maxicode, Micro PDF417, PDF417, DataMatrix | |
| Cutter | Partial or Full Cut (Command Control) | |
| Sensor | Paper Empty, Paper Near End, Black Mark, Label Gap | |
| Power Supply | PS60A : 24VDC ± 5% /TYP 3A | |
| Reliability | Print Head : 150KM; Cutter: 1.5M Cut | |
| Dimensions (WXDXH,mm) | 127X145.5X85.4 | 127X85.4X182.3 |
| Weight (g) | 630 | 725 |
| Safety Standard | CE, FCC, VCCI | |



Star-Asia Technology Ltd

T: +852-2799 6682 F: +852-2798 5050

Unit 1906, Enterprise Square Two, 3 Sheung Yuet Road, Kowloon, Hong Kong

All Rights Reserved. All trademarks are property of their respective owners.
Specifications are subject to change without notice.

www.StarAsia.com